

# **TOILET SEATS**

Bathroom Concepts

## **CONCEPTS**

### **TOILET SEAT**

Attractive, Ergonomic design lines  
Patented Quick Release System for  
Easy Cleaning and total hygiene  
Made in Australia



## **EZI-FIX**

### **TOILET SEAT**



Budget style plastic Toilet Seat  
Easy to install and Comfortable  
Made in Australia

## **HERITAGE**


### **TOILET SEAT**

Solid timber Toilet Seats  
with Brass hinges



## **CARLINA**

### **TOILET SEAT**

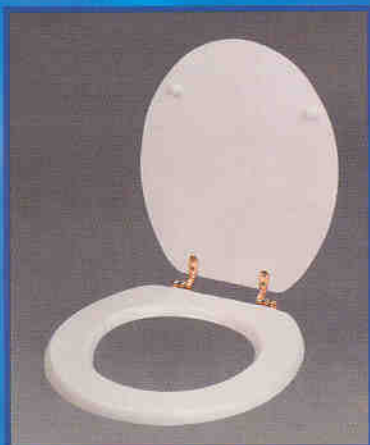

Solid MDF Toilet Seats  
with Brass hinges  
Attractive Colours to suit most decor

Another quality  
product from

**Award**

# Award<sup>®</sup> TOILET SEATS

Bathroom Concepts

## DIMENSIONS

EZI-FIX



380 x 35 x 470

CONCEPTS



400 x 40 x 490

CARLINA



370 x 70 x 460

HERITAGE



370 x 70 x 460

\* These Toilet Seats will fit most size Toilet Pans.

## INSTALLATION INSTRUCTIONS

### CONCEPTS

1. Release the Fixing Plate from the Toilet Seat by pushing the two side buttons simultaneously.



2. Position the Fixing Plate over the pan holes. Place the bolts through the Fixing Plate and pan holes.



Hand tighten the plastic nuts loosely, leaving the bolts to rotate freely.

3. Slide the Toilet Seat onto the Fixing Plate and allow the two buttons to 'click' into the slots.



4. If there is a connector plate between the seat and the cistern, mark the connector plate for cutting & trim accordingly. Once all components are positioned correctly hand tighten the plastic nuts firmly.



5. For Quick Release, Easy Cleaning and Total Hygiene, push the two buttons simultaneously and slide the Toilet Seat towards the front of the pan.



### EZI-FIX

1. Position Toilet Seat hinges over the pan holes.



2. Place bolts through hinges and through the pan holes.



3. Hand tighten the plastic nuts firmly.



4. Close the hinge covers with a 'click'.



### HERITAGE & CARLINA

1. Attach the circular metal bracket to the two metal hinges, using the phillips head screws provided. Leave the screws loose for later position adjustment.



3. Align the two circular metal brackets so the long thread passes through the centre of the toilet pan holes and tighten the phillips head screws once the seat is in the correct position.



2. Insert the long metal thread into the underside of the circular metal bracket into the outer holes (as per Diagram 2).



3. Position plastic washer over the long thread between the circular metal bracket and the toilet pan (as per Diagram 4). Pass thread through pan holes and tighten wing nut onto long thread from beneath.



Another quality product from  
**Award<sup>®</sup>**

**Award<sup>®</sup> Bathroom Concepts**

557 Burwood Hwy, Knoxfield, VIC. 3180.

Belwar Industries Pty Ltd

ACN 006 390 594

Ph: (03) 9871 8444 Fax: (03) 9801 5255

E-mail: sales@award.au.com

Website: www.award.au.com